

MetaLine® Series XL Ceramic Repair Compounds

trowelable or brushable ceramic products for the fast
and professional reconstruction of worn surfaces

Proven worldwide since 1960!

Power Generation

Pulp & Paper

Marine & Off-Shore

General Industry

Oil & Gas

Heating & Ventilation

Mining

Hydro Engineering

Petrochemical

Food Processing



MetaLine Series XL

■ abrasion-resistant, polymeric repair compounds

MetaLine Series XL represents a series of modern synthetic repair products designed to solve maintenance problems like leakage, breakage, erosion, corrosion, cavitation or wear. Internationally accepted as a leading technology to refurbish and strengthen impacted metallic structures. Reduces break-down times and minimizes costs. Perfectly suitable for

- professional repair work
- reconstruction of worn areas
- high-load bondings
- chemical resistant linings
- wear protective coatings

For field and „in-situ“ use. No cost-intensive application specialists are required. USDA approved for incidental food contact.



easy to apply

fast cure characteristics

machinable

heat resistant up to 235 °C

corrosion resistant

withstands deterioration



Material composition

two component, cold-curing, paste-like or liquid ceramic repair compounds. Based on a combination of solvent-free Novolac-Polymers synthesized with ceramic and non-metallic fillers. Formulated with the MetaLine experience of over **40 years** industrial engineering & coating installation.

Application

applied by trowel or brush in every desired thickness. Cures within 24 hours after mixing. No shrinkage. Sticks to most types of surfaces such as iron, (stainless) steel, aluminum, zinc, brass, enamel and many plastics.

Wear resistance

superior wear-resistant compounds with outstanding mechanical properties against aging, erosion, corrosion, cavitation or impingement. Resists linear or dynamic impact in dry and turbulent fluid-flow installations. Provides extraordinary chemical resistance against acids, caustics, salts, oils or gases. Electrically non-conductive.

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

MetaLine® Series XL - do-it-yourself solutions to fight against wear & tear

MetaLine Series XL

■ typical process characteristics



- **cold curing**
no thermal disforming of substrates
- **pro environment**
solvent free and non toxic
- **polymeric process**
no flame or explosion risks
- **machinable**
to every desired accuracy
- **non-conductive**
prevents electro-chemical corrosion
- **resists**
mechanical / chemical / thermal load
- **multi-purpose**
bonds ferrous to non-ferrous items
- **long lasting**
extend equipment life
- **economical**
cheaper than common repair methods
- **engineering solution**
safes spare-parts and shut down time




more versatile . . .

more durable . . .

more cost effective . . .

more professional . . .

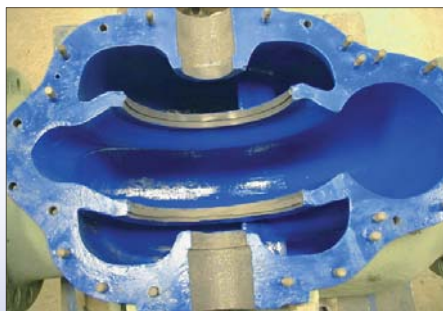

Process philosophy

a worldwide proven technology for do-it-yourself linings and professional repair work. Small range of different material types avoids large inventory. Easy and straight product selection reduces risks of mis-handling. Always available because of infinite shelf life properties. Exceptional performance profits due to the inherent, non-corroding synthetic product nature offering approved technical solutions.

Eases daily repair demands and quickly solves most renovative, preventive and constructive maintenance problems - just over night!

- engine bodies
- shafts / keyways
- machine beds
- hydraulic systems
- pump casings
- butterfly valves
- turbine impellers
- heat exchangers
- bearing houses
- tanks and pipes
- cylinders
- keyways
- flange areas
- valve seats
- cooling units

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

MetaLine® Series XL - do-it-yourself solutions to fight against wear & tear

MetaLine Series XL

■ choice of materials / how to select

<p>Product name MetaLine SXL</p>	<p>Product name MetaLine KXL</p>	<p>Product name MetaLine CXL</p>
<p>Description trowelable, ceramic-grade for the rebuilding of worn areas or the repair of damaged equipment</p>	<p>Description brushable, semi self leveling ceramic-grade for the lining of surfaces impacted by liquids</p>	<p>Description trowelable, carbide-grade for the protection of dry/wet surfaces extremely impacted by solids</p>
<p>Thixotropic paste-like (high density)</p>	<p>Thixotropic liquid (medium density)</p>	<p>Thixotropic paste-like (high density)</p>
<p>Method of application trowel or spatula</p>	<p>Method of application brush or trowel</p>	<p>Method of application trowel or spatula</p>
<p>Typical applications</p> <ul style="list-style-type: none"> ■ worn keyways ■ scored machine beds ■ cracked engine bodies 	<p>Typical applications</p> <ul style="list-style-type: none"> ■ eroded vacuum pumps ■ cavitated valves ■ corroded heat exchangers 	<p>Typical applications</p> <ul style="list-style-type: none"> ■ centrifuges / decanters ■ turbo separators ■ pulverizing mills / pulpers
<p>Typical work size partial repairs</p>	<p>Typical work size full linings</p>	<p>Typical work size partial linings</p>
<p>Cure time 24 hours at 20 °C</p>	<p>Cure time 24 hours at 20 °C</p>	<p>Cure time 24 hours at 20 °C</p>
<p>Film thickness</p> <p>minimum: 0,1 mm maximum: unlimited recommended: > 1 mm</p>	<p>Film thickness</p> <p>minimum: 0,1 mm maximum: unlimited recommended: 1,5 mm</p>	<p>Film thickness</p> <p>minimum: 2,0 mm maximum: unlimited recommended: > 5 mm</p>
<p>Machinable by grinding / milling / lathe</p>	<p>Machinable by grinding / milling / lathe</p>	<p>Machinable by grinding only</p>



Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).


DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

MetaLine® Series XL - do-it-yourself solutions to fight against wear & tear

MetaLine SXL

■ putty ceramic repair compound

Application method	spatula / trowel
Colour	grey
Mixing ratio	3 : 1 by volume
Hardness	95 Shore D
Density	2,34 g/cm³
Compressive strength	156 N/mm²
Tensile bond strength (mild steel)	20 N/mm²
Tensile shear adhesion (stainless steel)	21 N/mm²
Tensile strength	22 N/mm²
Flexural strength	68 N/mm²
Impact resistance (IZOD)	36 J/m
Heat resistance	+235 °C / +90 °C
TABER-Abrasion (CS17, dry, 1 kg, 1000 rev.)	no measurable loss
Coefficient of thermal expansion	23,3 x 10 ⁻⁶ K ⁻¹
Solids content	100 %
Working life (at 20 °C)	20 minutes
Full Cure (at 20 °C)	> 1 day
Coverage	2.340 g/m²
Chemical resistance	use separate guide

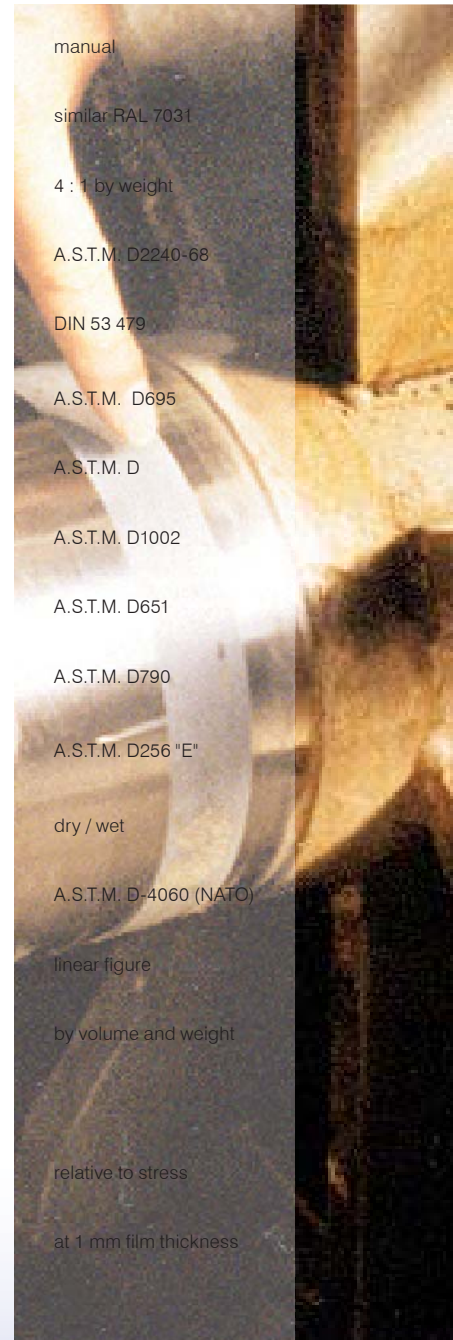

manual
 similar RAL 7031
 4 : 1 by weight
 A.S.T.M. D2240-68
 DIN 53 479
 A.S.T.M. D695
 A.S.T.M. D
 A.S.T.M. D1002
 A.S.T.M. D651
 A.S.T.M. D790
 A.S.T.M. D256 "E"
 dry / wet
 A.S.T.M. D-4060 (NATO)
 linear figure
 by volume and weight
 relative to stress
 at 1 mm film thickness

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

MetaLine KXL

■ liquid ceramic repair compound

Application method	brush / trowel
Colour	light-grey
Mixing ratio	14,3 : 1 by weight
Hardness	97 Shore D
Density	2,20 g/cm ³
Compressive strength	141 N/mm ²
Tensile bond strength (mild steel)	20 N/mm ²
Tensile shear adhesion (stainless steel)	21 N/mm ²
Tensile strength	21 N/mm ²
Flexural strength	58 N/mm ²
Impact resistance (IZOD)	66 J/m
Heat resistance	+235 °C / +60 °C
TABER-Abrasion (CS17, dry, 1 kg, 1000 rev.)	no measurable loss
Coefficient of thermal expansion	16,6 x 10 ⁻⁶ K ⁻¹
Solids content	100 %
Working life (at 20 °C)	30 minutes
Full Cure (at 20 °C)	> 1 day
Coverage	2.200 g/m ²
Chemical resistance	use separate guide




Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

MetaLine CXL

■ ceramic carbide repair compound

Application method	trowel
Colour	brown
Mixing ratio	2 : 1 by weight
Hardness (polymeric matrix)	93 Shore D
Hardness (carbide filler)	9 Mohs
Density	2,53 g/cm ³
Minimum film thickness	> 2 mm
Compressive strength	109 N/mm ²
Tensile bond strength (mild steel)	21 N/mm ²
Tensile shear adhesion (stainless steel)	21 N/mm ²
Flexural strength	54 N/mm ²
Heat resistance	+235 °C / +90 °C
TABER-Abrasion (CS17, dry, 1 kg, 1000 rev.)	no measurable loss
Coefficient of thermal expansion	25,5 x 10 ⁻⁶ K ⁻¹
Solids content	100 %
Working life (at 20 °C)	20 minutes
Full Cure (at 20 °C)	> 1 day
Coverage	2.530 g/m ²
Chemical resistance	use separate guide

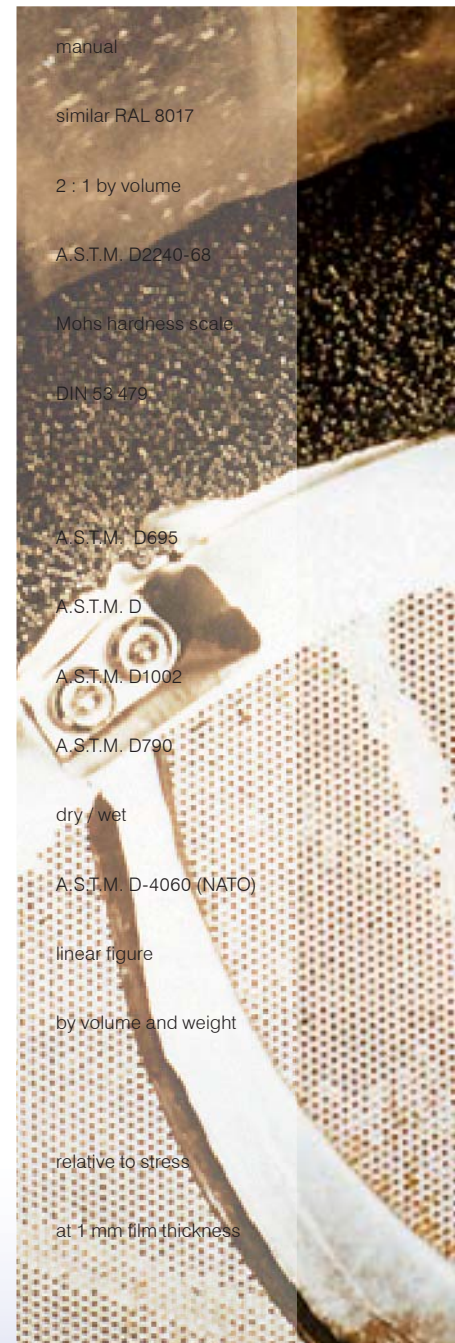

manual

similar RAL 8017

2 : 1 by volume

A.S.T.M. D2240-68

Mohs hardness scale

DIN 53 479

A.S.T.M. D695

A.S.T.M. D

A.S.T.M. D1002

A.S.T.M. D790

dry / wet


A.S.T.M. D-4060 (NATO)

linear figure

by volume and weight

relative to stress

at 1 mm film thickness

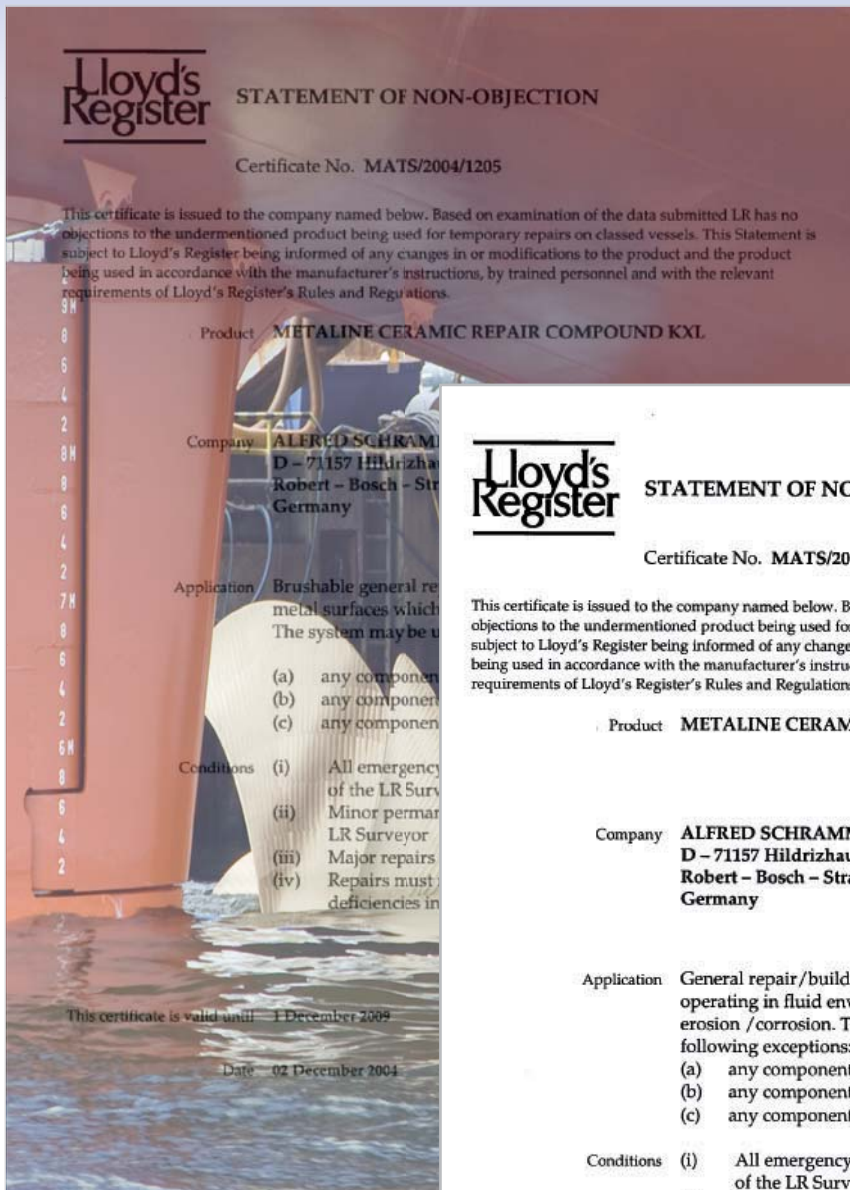

Lloyd's Register

STATEMENT OF NON-OBJECTION

Certificate No. **MATS/2004/1205**

This certificate is issued to the company named below. Based on examination of the data submitted LR has no objections to the undermentioned product being used for temporary repairs on classed vessels. This Statement is subject to Lloyd's Register being informed of any changes in or modifications to the product and the product being used in accordance with the manufacturer's instructions, by trained personnel and with the relevant requirements of Lloyd's Register's Rules and Regulations.

Product **METALINE CERAMIC REPAIR COMPOUND KXL**

Company **ALFRED SCHRAMM
D - 71157 Hildrizhausen
Robert - Bosch - Str.
Germany**

Application **Brushable general re-
metal surfaces which
The system may be u**

- (a) any component
- (b) any component
- (c) any component

Conditions (i) All emergency
of the LR Surveyor
(ii) Minor permanent
LR Surveyor
(iii) Major repairs
(iv) Repairs must
deficiencies in

This certificate is valid until **1 December 2009**

Date **02 December 2004**

Lloyd's Register

STATEMENT OF NON-OBJECTION

Certificate No. **MATS/2004/1206**

This certificate is issued to the company named below. Based on examination of the data submitted LR has no objections to the undermentioned product being used for temporary repairs on classed vessels. This Statement is subject to Lloyd's Register being informed of any changes in or modifications to the product and the product being used in accordance with the manufacturer's instructions, by trained personnel and with the relevant requirements of Lloyd's Register's Rules and Regulations.

Product **METALINE CERAMIC REPAIR COMPOUND SXL**

Company **ALFRED SCHRAMM molecular- technik GmbH & Co
D - 71157 Hildrizhausen
Robert - Bosch - Strasse 9
Germany**


Application **General repair/building compound for rebuilding metal surfaces
operating in fluid environments which have been subjected to
erosion /corrosion. The system may be used subject to the
following exceptions:**


- (a) any component in rubbing contact with another
- (b) any component subject to dynamic cyclic loading
- (c) any component where the temperature exceeds 60°


Conditions (i) All emergency repairs are to be brought to the attention
of the LR Surveyor as soon as practical
(ii) Minor permanent repairs are subject to the discretion of the
LR Surveyor
(iii) Major repairs are subject to individual consideration
(iv) Repairs must not be used as means of making good
deficiencies in strength

This certificate is valid until **1 December 2009**

Date **02 December 2004**


J.C. Howson
Surveyor to Lloyd's Register EMEA
A member of the Lloyd's Register Group

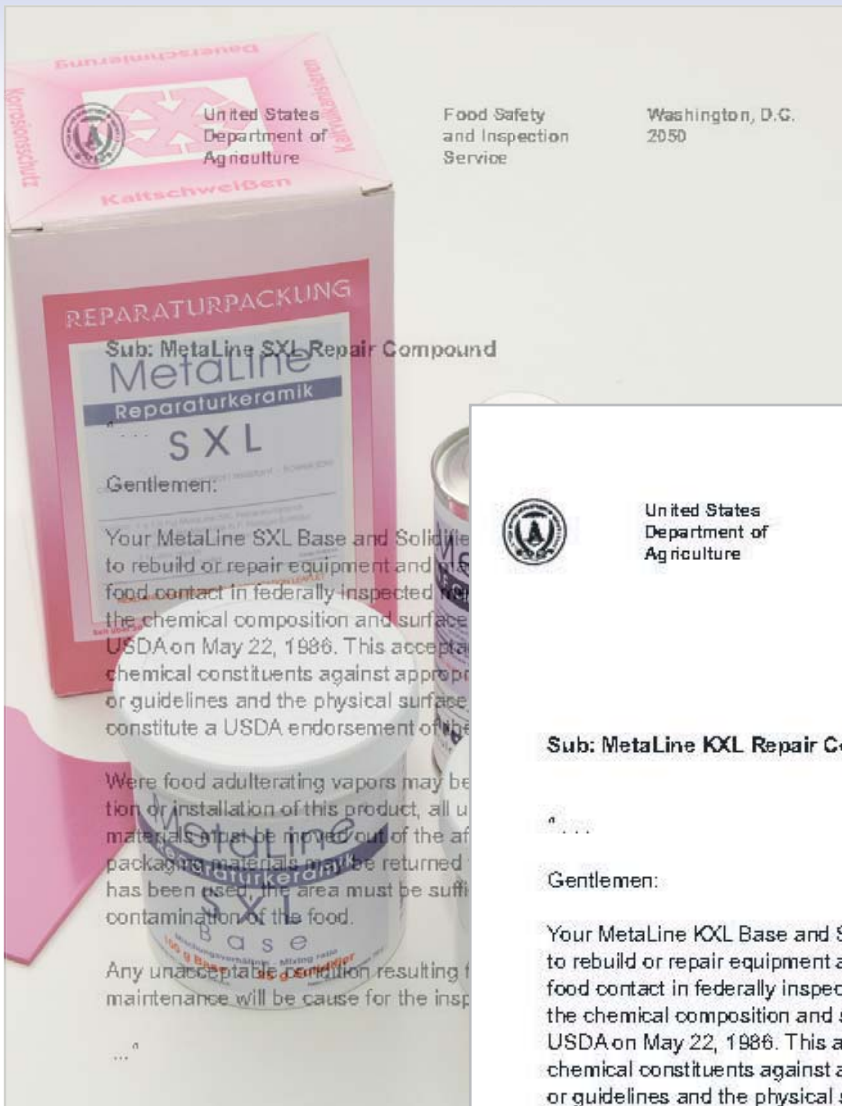


United States
Department of
Agriculture
Food Safety
and Inspection
Service
Washington, D.C.
2050

Sub: MetaLine SXL Repair Compound

Gentlemen:

Your MetaLine SXL Base and Solidifier Components are acceptable to rebuild or repair equipment and machinery which has incidental food contact in federally inspected meat and poultry plants as long as the chemical composition and surface finish remain as submitted to USDA on May 22, 1986. This acceptance is based on a review of the chemical constituents against appropriate FDA or USDA regulations or guidelines and the physical surface characteristics. This does not constitute a USDA endorsement of the performance of this product.

Were food adulterating vapors may be generated during the preparation or installation of this product, all unprotected food and packaging materials must be moved out of the affected area. Before food and packaging materials may be returned to the area where the material has been used, the area must be sufficiently free of odor to prevent contamination of the food.

Any unacceptable condition resulting from im-proper installation or maintenance will be cause for the inspector to require correction

...

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.1. pipe-work & elbows

seal leaking tubes


repair synthetic pipe-materials

strengthen elbow areas

protect immersed equipment

- non-flammable and non-sparking process

- resists pressure up to 200 bars

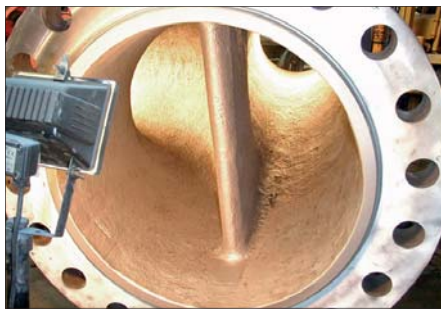

Specific application information

- If possible, all pipe repairs should be realized at the outside diameter of the pipe-work.
- Treat the surface by flame or heat to sweat out penetrated residues (if allowed)
- Extend the actual repair area for minimum 100 mm in all directions and grit blast or roughen it. If necessary use spark-protected tools. If emptying is not possible, stop leaking fluids by use of glue or ultra fast curing resin. Clean with solvent and let it dry
- Prepare MetaLine SXL and apply. For pipe diameters less than 80 mm and low to medium pressure use several layers of fine metal sieve (mesh) to strengthen the compound. Wrap it around the pipe and saturate well all reinforcement material. Finally smoothen the surface
- For larger diameters or high pressure applications use a grit blasted strong metal plate in the form of a half-pipe. Apply MetaLine SXL and fix immediately with bolts

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.2. tanks, containers & vessels

seal leaking storage tanks

repair porous oil sumps




resurface corroded casings

overcoat leaking welding seams

repair cracked engines blocks

- suitable for internal or external sealing

- approved for incidental food contact

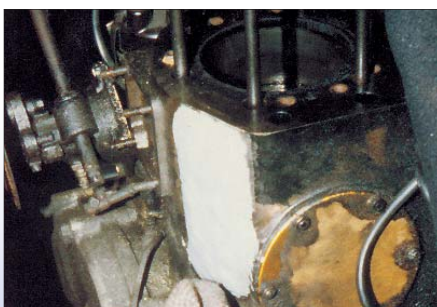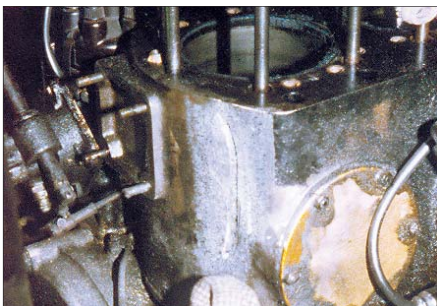

Specific application information

- If possible, all leakage repairs should be realized at the inside of the vessel
- Treat the substrate by flame or heat to sweat out penetrated residues (if allowed)
- Grind down all welding seams. Extend the actual repair area for minimum 30 mm in all directions and grit blast or roughen it. In case of open cracks, drill holes at each end of the crack. Stop leaking fluids by use of glue or ultra fast curing resin. Clean with solvent and dry afterwards
- Apply MetaLine SXL. Use several layers of fine metal sieve (mesh) to strengthen the compound. Saturate well all reinforcement material and smoothen the surface
- In case of bigger cracks or missing structure use a heavy metal plate instead the mesh. Fix thoroughly with bolts. This will result in much higher tensile resistance and restrict expansion

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.3. bearings & seats

seal leaking bearings

recontur oversized seats

repair cutlass bearings

cast line-shaft bearings

- oil and salt water resistant
- rebuilding without machining



Specific application information

- Drain of all oil, grease or other lubricants from the bearing area
- Extend the actual dimension of the seat to a minimum bearing distance of 1 mm in the radius. Treat the seat by flame or heat to sweat out penetrated residues (if allowed)
- Thoroughly grit blast or roughen. Clean with solvent and dry afterwards
- Isolate the bearing by use of MetaLine Release Agent
- Apply or inject (by use of a cartridge) MetaLine SXL into the bearing seat as well as onto the bearing itself. Insert the bearing and take care not to pollute it
- Adjust the accurate bearing position and fix during the material cure

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion



1.4. flanges & couplings

rebuild flange areas

repair drive faces

contour gasket areas

- resists high compression forces
- extremely accurate when moulded



Specific application information

- Deepen existing undersize to a minimum of 2 mm. End all repair areas by a sharp (90°) contour
- Treat the surface by flame or heat to sweat out penetrated residues (if allowed). Thoroughly grit blast or roughen the repair area. Clean with solvent and let it dry
- Isolate the other flange side (or alternatively a clean metal plate) by use of MetaLine Release Agent
- Apply or inject (by use of a cartridge) MetaLine SXL onto the roughened flange side. Bolt both flanges together and remove excessive material (moulding procedure)
- Alternatively apply MetaLine SXL and machine it after cure

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.5. casing porosities & voids

seal porous structures




create gas-tight linings

rebuild faulty castings

repair leaking transformers

recontur damaged moulds

- easy to apply by brush or trowel
- can be painted or treated by galvanizing processes



Specific application information

- Deepen existing surface irregularities to a minimum of 1 mm. End all repair areas by a sharp (90 °) contour
- Treat the surface by flame or heat to sweat out penetrated residues (if allowed). Thoroughly grit blast or roughen the repair area. Clean with solvent and let it dry
- Trowel-apply or inject (by use of a cartridge) MetaLine SXL onto the prepared surface
- In case of deep marks apply MetaLine KXL by brush first. Immediately followed by a smoothing coat of paste-like MetaLine SXL. Avoid to incorporate air pockets

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.6. engines & drives



seal casings cracks

repair leaking equipment

stabilize crack sensitive areas

rebuild stripped threads

- high thermal coefficient of expansion
- suitable for grey-cast-iron, aluminium, etc.

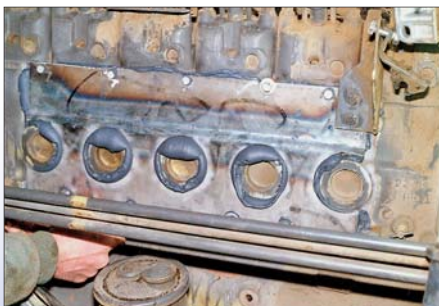

Specific application information

- Remove existing welding seams by grinding. Drill holes (diameter 5 mm) at each end of the crack as well as every 50 mm through the crack. Grind along the crack and widen it in form of a „V“. Place screws in the holes and widen it to the expected expansion if it arrives to usage temperature
- Treat the surface by flame or heat to sweat out penetrated residues (if allowed). Extend the actual repair area for minimum 50 mm in all directions and thoroughly grit blast or roughen it. Clean with solvent and let it dry
- Apply MetaLine SXL in a thickness of 5 mm. Use several layers of fine metal sieve (mesh) to strengthen the compound. Saturate all reinforcement material and smoothen the surface. Never apply MetaLine SXL beyond the prepared area
- In case of bigger cracks or high casing thickness use a heavy metal plate instead the mesh. Fix thoroughly with screws. This will result in much higher tensile resistance and restrict expansion

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- **breakage**
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.7. casing breakage

repair broken gear boxes

overbridge missing structures

rebuild frost damages

- resistant against vibration and thermal shock
- extended application life for proper installation



Specific application information

- Remove existing welding seams by grinding. Check surface for cracks and treat as indicated in 1.6. Treat the surface by flame or heat to sweat out penetrated residues (if allowed)
- If the missing structure is still available, reduce it in its dimensions. Fix with metal bandages and bolts. If the structure is lost, use a heavy steel plate (thickness minimum 3 mm). Extend the actual repair area for minimum 50 mm in all directions and thoroughly grit blast or roughen it. Clean with solvent and let it dry
- Apply MetaLine SXL and seal the structure from all sides. Bolt the steel plate over the repair area. Saturate all reinforcement material and smoothen the surface. Never apply MetaLine SXL beyond the prepared area
- Consider enough flexibility in the system to balance thermal expansion in case of higher usage temperatures

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion




1.8. machine beds & guides

repair partial wear on beds

fill misdrilled holes

balance undersize tolerances

- sliding characteristics (no stick-slip)
- reconstruction without dismantling of guides

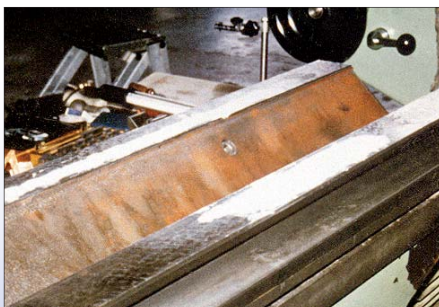

Specific application information

- Treat the surface by flame or heat to sweat out penetrated residues (if allowed)
- In case of scored machine beds drill holes along the wear area (diameter and depth about 2 mm). Distance about 2/3 of the diameter used later to enlarge the repair area
- Enlarge the scored area plus 3 mm in all directions by a second drilling procedure. Clean with solvent and let it dry
- Apply MetaLine SXL about 0,5 -1 mm thicker than required. Watch out not to incorporate air pockets
- After 3-4 hours cure time start machining to final scale. Use milling, scrabbing or polishing

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.9. shafts, journals & hydraulic rams



repair worn bearing areas

rebuild spline couplings

repair worn keyways

seal leaking hydraulic rams

- machinable by drilling, milling, grinding, etc.
- matrix-moulding to final accuracy possible



Specific application information

- Treat the shaft by turning (lathe operation) with great feed into the form of a thread (15 turns per cm). Exterior angle about 90°. Cutting depth minimum 1,5 mm. Create a sharp and rough contoured surface structure
- Treat the surface by flame or heat to sweat out penetrated residues (if allowed). Clean with solvent and let it dry
- Rotate the shaft slowly and apply MetaLine SXL about 2 mm thicker than required. Watch out not to incorporate air pockets. After 3-4 hours cure time start machining to final scale. Use lathe operation or preferably grinding
- Alternatively use two half-shells with an inside diameter corresponding to the requested outside diameter of the shaft. Isolate with MetaLine Release Agent. Apply MetaLine SXL to the prepared shaft as well as to the shells. Install the shells and press firmly. Adjust thoroughly. Remove shells after cure and grind down the seams. The final surface quality correspond to the actual surface quality of the shells

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.10. bearing seats

repair roller bearing seats





reseat bearing shells

reform division bar seats

reform ball joint housings

realign pins into oversized seats

- cures without swelling or shrinkage
- securely stops crevice corrosion

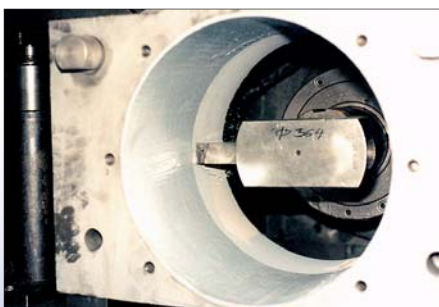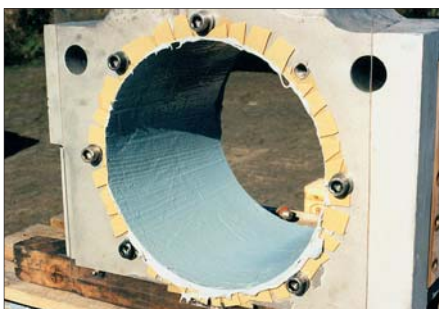

Specific application information

- Extend the actual dimension of the seat to a minimum bearing distance of 1 mm in the radius. Flame treat to sweat out penetrated residues (if allowed)
- Thoroughly grit blast or roughen the surface. Clean with solvent and dry afterwards
- Isolate the bearing by use of MetaLine Release Agent
- Apply or inject (by use of a cartridge) MetaLine SXL into the bearing seat as well as onto the bearing itself. Insert the bearing and take care not to pollute it
- Adjust the accurate bearing position and fix during the material cure
- In case of ball joint housings treat the lower bearing shell first as indicated above. After cure treat the upper bearing shell

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- abrasion

1.11. bushings


reseat bushes

create non-metallic bush seats

restore bronze bushes

- fast cure characteristics available

- semi elastic properties resists cyclic load



Specific application information

- Extend the actual dimension of the seat to a minimum bush distance of 1 mm in the radius. Flame treat to sweat out penetrated residues (if allowed)
- Thoroughly grit blast or roughen the seat as well as the outside of the bush. Clean with solvent and dry afterwards
- Apply MetaLine SXL on both parts. Insert the bush with a light rotating motion. Adjust and let it cure
- Due to the electro-chemically isolating properties of MetaLine Ceramic Compounds, more abrasion resistant bush materials can be used which normally would be unsuitable due to bi-metallic-corrosion

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- **corrosion**
- erosion
- cavitation
- abrasion

1.12. chemical corrosion

line surface treatment systems

encapsulate immersed pumps

coat tanks and structures

protect de-sulphurisation units

- seamless treatment on all complex surfaces
- extremely resistant against chemical attack



ceramic-like high quality protection



Specific application information

- Grit blast corroded surfaces. Steam clean to dissolve chemical impurities. Flame treat to sweat out deeper penetrated residues and to dry (if allowed)
- Thoroughly grit blast the surface again. Use sharp contoured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2 (Swedish Standard). Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally in case of leaks. Incorporate a fine metal sieve (mesh) in case of missing surface strength
- Continue wet in wet with a coat of brushable MetaLine KXL. After the minimum overcoating time as elapsed apply a second coat MetaLine KXL in 90° application direction to the first coat

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- **corrosion**
- erosion
- cavitation
- abrasion

1.13. galvanic corrosion



line condensers

isolate heat exchangers

protect vapourizers

bond steel to stainless steel

- electrically isolating (non-conductive)
- extremely resistant against permeation

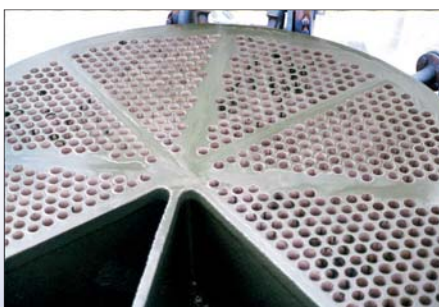

Specific application information

- Heat exchanger: Use a milling tool and deepen the plate around all tube ends. Flame treat to sweat out penetrated residues (if allowed). Close tubes with rubber plugs. Thoroughly grit blast the plate as well as all tubes from the outside. Minimum blasting profile is 50-75 my
- Clean with solvent and let it dry
- Vertical positioning: Apply MetaLine SXL locally and recontur manually to the original shape. Alternatively treat a heavy metal plate with MetaLine Release Agent. Press it against the uncured MetaLine SXL and fix with clamps until the repair compound is completely cured
- Horizontal positioning: Apply MetaLine KXL by use of a cartridge. Use the self-levelling material characteristics to smoothen the surface

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- **erosion**
- cavitation
- abrasion

1.14. fluid-flow equipment (casings)

repair flow straighteners

rebuild eroded pump casings

reprofile cutwater profiles

repair split casings pumps

reduce wear ring clearances

restore scroll pump bores

- **exceptional resistance against erosion**
- **performance gains up to 4 % on new equipment**



Specific application information

- Grit blast all surfaces. Steam clean the part (high pressurized hot water) in case it has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues
- Thoroughly grit blast the surface again. Use sharp contoured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2 (Swedish Standard). Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally in case of leaks or missing structure. Incorporate a fine metal sieve (mesh) to over-bridge holes or cracks
- Continue wet in wet with a coat of brushable MetaLine KXL. After the minimum overcoating time as elapsed apply a second coat MetaLine KXL in 90° application direction to the first coat

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- **erosion**
- cavitation
- abrasion

1.15. fluid-flow equipment (impellers & mixers)

repair impeller vane corrosion

recontur eroded mixers

treat mixer blades to non-stick

- low weight gravity reduce need for balancing
- ecologically friendly and user-safe technology



Specific application information

- Grit blast all surfaces. Steam clean (high pressurized hot water) in case it has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues
- Thoroughly reblast the surface. Use sharp contoured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2. Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally in case of leaks or missing structure. Incorporate a fine metal sieve (mesh) to over-bridge holes or cracks
- Pin-hole like substrates should be treated with brushable MetaLine KXL instead, to minimize risk of air pockets. Continue wet in wet with MetaLine SXL
- Continue wet in wet with a coat of brushable MetaLine KXL. After the minimum overcoating time as elapsed apply a second coat MetaLine KXL in 90° application direction to the first coat

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- **erosion**
- cavitation
- abrasion

1.16. liquid ring vacuum pumps (Nash & Elmo)

- repair & protect rotors
- reduce cone clearances
- repair valve plates
- rebuild profile of end covers
- restore accurate tolerances

- **thixotropic characteristic to ease over-head-work**
- **different colours per coat (visual life-time indicator)**



Specific application information

- Grit blast all surfaces. Steam clean (high pressurized hot water) in case the part has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues
- Thoroughly reblast the surface. Use sharp contoured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2. Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally and rebuild missing structure. Pin-hole like substrates should be treated with brushable MetaLine KXL instead, to minimize risk of air pockets. Continue wet in wet with MetaLine SXL
- After cure grind down to restore the accurate profile. Grit blast carefully to reactivate the whole surface. Clean
- Apply MetaLine KXL. After the minimum overcoating time has elapsed apply a second coat MetaLine KXL. After cure give a lathe or grinding operation to final scale

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- **cavitation**
- abrasion


1.17. butterfly & gate valves

re-profile slides

rebuild valve bodies

protect gates

- **gas-tight properties (low permeability)**
- **cures in any shape without surface tension**



Specific application information

- Grit blast all surfaces. Steam clean (high pressurized hot water) in case the part has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues. Grind down edges to a radius of minimum 3 mm. In case of partial coating work deepen all rebuilding areas with a sharp 90 ° angel to a minimum of 1,5 mm
- Thoroughly reblast the surface. Use sharp contured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2. Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally by trowel or inject with a cartridge. Rebuild missing structures by use of a precise metal or wooden stencil. Leave enough off-set for the following two layers MetaLine KXL
- Continue with a coat of brushable MetaLine KXL. After the minimum overcoating time as elapsed apply a second coat KXL in 90° application direction to the first coat

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- **cavitation**
- abrasion

1.18. water turbines (casings)

repair cavitation damage

rebuild guide wings

protect water outlet areas

- **polymeric product matrix resists cavitation impact**
- **can be heat treated to accelerate cure**



Specific application information

- Grit blast all surfaces. Steam clean (high pressurized hot water) in case it has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues. Grind down edges or sharp contours to a radius of minimum 3 mm
- Thoroughly reblast the surface. Use sharp contured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2. Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally by trowel or inject with a cartridge. Rebuild missing structures. Pinhole-like substrates should be treated with brushable MetaLine KXL instead, to minimize risk of air pockets. Continue wet in wet with MetaLine SXL
- Continue wet in wet with a coat of brushable MetaLine KXL. After the minimum overcoating time as elapsed apply a second coat MetaLine KXL in 90° application direction to the first coat

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- **cavitation**
- abrasion

1.19. water turbines (impellers)


coat „Francis“ impellers

rebuild „Kaplan“ impellers

protect turbine shafts

Note: Not suitable for „Pelton“ turbines

- **self-leveling properties reduce impingement**
- **applicable in every desired thickness**



Specific application information

- Grit blast all surfaces. Steam clean (high pressurized hot water) in case it has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues. Grind down edges or sharp contours to a radius of minimum 3 mm
- Thoroughly reblast the surface. Use sharp contured fresh blasting grit with a mesh-size of 1-2 mm. Required profile is 50-75 microns and a surface quality of SA 2 1/2. Vacuum afterwards. Clean with solvent and let it dry
- Apply MetaLine SXL locally by trowel or inject with a cartridge. Rebuild missing structures. Pinhole-like substrates should be treated with brushable MetaLine KXL instead, to minimize risk of air pockets. Continue wet in wet with MetaLine SXL
- Continue wet in wet with a coat of brushable MetaLine KXL. After the minimum overcoating time as elapsed apply a second coat MetaLine KXL in 90° application direction to the first coat

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de

MetaLine® Series XL - do-it-yourself solutions to fight against wear & tear

- leakage
- breakage
- wear & tear
- corrosion
- erosion
- cavitation
- **abrasion**

1.20. solids impingement (centrifuges & decanters)

repair centrifuges / decanters

protect feeding screws

restore pulpers

rebuild wear plates


- resists impacting solids in dry or wet environment
- easy to repair in case of partial damage



complete protection of a pulper



repair-work at a decanter

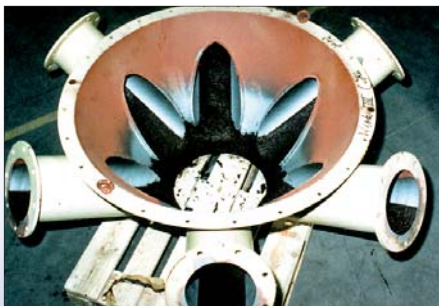

Specific application information

- Grit blast all surfaces. Steam clean (high pressurized hot water) in case the part has been objected to salt-water or chemicals before. Flame treat to sweat out penetrated residues. Remove existing welding seams. Grind down edges to a radius of minimum 3 mm
- Thoroughly reblast the surface. Use sharp contoured fresh blasting grit with a mesh-size of 1-2 mm. In case of stainless steel surfaces use non-metallic (ceramic) grit. Required profile is 50-75 microns and a surface quality of SA 2 1/2. Vacuum afterwards. Clean with solvent and let it dry
- Apply **MetaLine CXL** by trowel. Rebuild missing structures by use of a precise metal or wooden stencil. Press down firmly to receive a perfect bond and to avoid air entrapment. Recommended material thickness is about 5 mm

Subject to technical modifications! Information and application examples in this overview are provided to the best of our knowledge. However, they also apply without guarantee in reference to the exclusive rights of third parties and do not release the user to check the products and processes for their suitability and material tolerance regarding their intended use. We do not assume liability for the application results. MetaLine is a registered Trademark of our company. Copyright by MetaLine Surface Protection GmbH, DE-71157 Hildrizhausen (2004).

DE-71157 Hildrizhausen (Germany) | Phone +49 (0) 7034 3100-0 | info@metaline.de